



# SOSEN LED Driver, Your Smart Choice

## Specifications

### 40W Class I/II NFC Driver with DALI-2 and D4i

Model: SS-40PA-XXF

Description: 40W Class I/II NFC Driver  
with DALI-2 and D4i

Rev.: V01

Release Date: 2024-06-01

# 40W Class I/II NFC Driver with DALI-2 and D4i

**SOSEN**  
LED DRIVER



**LED DRIVER**

**PA Series**



## Features:

- Efficiency up to 90%
- Adjusted by NFC
- DALI-2 & D4i certification
- Dim-to-off & Standby power  $\leq 0.5W$
- Surge Protection: CM: 10kV, DM: 6kV
- AUX Power: 24V/125mA
- Low Inrush Current  $\leq 15A$
- Built-in 16Vdc DALI-2 bus power supply
- Built-in AC power metering with up to  $\pm 1\%$  accuracy
- AC Dimming/Timing/ELA/CLO/NTC
- Protections: SCP/OTP/OVP/OPP
- Suitable for Class I /II luminaires
- IP20
- Installation dimensions conform to Zhaga standards
- Warranty: 8 years



**RoHS**



## Description:

SS-40PA-XXF is a 40W NFC intelligent LED driver. It can realize interconnection with intelligent lighting system to achieve fine control and management, as well as being compatible and connected with a wide variety of intelligent lighting systems and controllers. Our product has multiple intelligent functions, such as real-time adjustment of the power, brightness and color of the luminaires, supporting intelligent lighting scene settings and adjustments, as well as monitoring the status and faults of the luminaires, and carry out remote management and maintenance, etc. In addition, it also has a full range of protection mechanism, highly efficient electrical power conversion and consistent output performance, which can provide stable, safe and reliable power supply support for LED luminaires.

### Application:

Street lights, Tunnel lights, Sports lights.

## Model List:

Model	Input Range	Max. Pout	Vout Range	Full Power Vo Range	Iout Range	Default Output Current	THD(Typ.)	PF(Typ.)	Eff.(Typ.)	Max.Tc
SS-40PA-57F	80-264Vac 168-280Vdc	40W	19-57V	38-57V	0.2-1.05A	1.05A	8%	0.98	89%	90°C
SS-40PA-80F	80-264Vac 168-280Vdc	40W	25-80V	57-80V	0.2-0.7A	0.7A	8%	0.98	90%	90°C
SS-40PA-133F	80-264Vac 168-280Vdc	40W	44-133V	89-133V	0.2-0.45A	0.45A	8%	0.98	90%	90°C

Note:

- 1.Default Tested: at 230Vac, full load, Ta 25°C.
- 2.The performance of the LED Driver can be guaranteed within the full power Vo range.The voltage lower than full power Vo range, it is need to test the performance with the LED module;
- 3.Low inrush current due to istart, which enables a single MCB to control more LED drivers.

1/20

# 40W Class I/II NFC Driver with DALI-2 and D4i

## Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	220Vac		240Vac	
Input AC Voltage Range	80Vac		264Vac	Including AC dimming function
Input DC Voltage Range	168Vdc		280Vdc	
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			0.35A	200Vac, Full load
Max Inrush Current(230Vac)			15A	Cold start
Power metering	-1%		+1%	220Vac, Full load
Standby Power			0.5W	230Vac/50Hz, Dim to off, Turn off DALI-2 bus power
Power Factor	0.96	0.98		230Vac/50Hz, Full load
	0.90			220-240Vac/50Hz, 40-100% load
THD		8%	10%	230Vac/50Hz, Full load
			20%	220-240Vac/50Hz, 40-100% load

# 40W Class I/II NFC Driver with DALI-2 and D4i

## O/P Characteristics(SS-40PA-57F):

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	19V		57V	Power derated @19-38V
Rated O/P Voltage	38V		57V	$P_o=V_o \cdot I_o=40W$ , Full load
Rated O/P Current	0.7A		1.05A	1.05A for 38V,0.7A for 57V
Adj. O/P Current (AOC)Range	0.3A		1.05A	Output current can be adjusted by NFC
No Load Voltage			70V	
Efficiency @230Vac	87.0%	89.0%		O/P 57V/0.7A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Output $P_{stLM}$			1	Full load
Output SVM			0.4	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.7S	230Vac, Full load
Line Regulation	-1%		+1%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C	95°C	110°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection				Driver will not be damaged, CC mode

# 40W Class I/II NFC Driver with DALI-2 and D4i

## O/P Characteristics(SS-40PA-80F):

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	25V		80V	Power derated @25-57V
Rated O/P Voltage	57V		80V	$P_o=V_o \cdot I_o=40W$ , Full load
Rated O/P Current	0.5A		0.7A	0.7A for 57V,0.5A for 80V
Adj. O/P Current (AOC)Range	0.2A		0.7A	Output current can be adjusted by NFC
No Load Voltage			100V	
Efficiency @230Vac	88.0%	90.0%		O/P 80V/0.5A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Output $P_{stLM}$			1	Full load
Output SVM			0.4	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.7S	230Vac, Full load
Line Regulation	-1%		+1%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C	95°C	110°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection				Driver will not be damaged, CC mode

# 40W Class I/II NFC Driver with DALI-2 and D4i

## O/P Characteristics(SS-40PA-133F):

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	44V		133V	Power derated @44-89V
Rated O/P Voltage	89V		133V	$P_o=V_o \cdot I_o=40W$ , Full load
Rated O/P Current	0.3A		0.45A	0.45A for 89V,0.3A for 133V
Adj. O/P Current (AOC)Range	0.2A		0.45A	Output current can be adjusted by NFC
No Load Voltage			150V	
Efficiency @230Vac	88.0%	90.0%		O/P 133V/0.3A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Output $P_{stLM}$			1	Full load
Output SVM			0.4	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.7S	230Vac, Full load
Line Regulation	-1%		+1%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C	95°C	110°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection				Driver will not be damaged, CC mode

# 40W Class I/II NFC Driver with DALI-2 and D4i

## Dimming Characteristics:

Parameter		Min.	Typ.	Max.	Remark
DALI-2	DA+, DA- High Level	9.5V	16V	22.5V	
	DA+, DA- Low Level	-6.5V	0V	6.5V	
	DA+, DA- Current	0mA		2mA	
AC Dim	Start Input Voltage	180Vac		264Vac	Default 200Vac
	Start Output Level	100%			
	Stop Input Voltage	80Vac		244Vac	Default 160Vac
	Stop Output Level	10%		40%	Default 30%
	Gap between Start and Stop Input Voltage	20Vac			
Dimming Output Range	SS-40PA-133F	10%loset		loset	$300\text{mA} \leq \text{loset} \leq 450\text{mA}$
	SS-40PA-80F				$500\text{mA} \leq \text{loset} \leq 700\text{mA}$
	SS-40PA-57F				$700\text{mA} \leq \text{loset} \leq 1050\text{mA}$
	SS-40PA-133F	30mA		loset	$30\text{mA} \leq \text{loset} \leq 300\text{mA}$
	SS-40PA-80F	50mA			$50\text{mA} \leq \text{loset} \leq 500\text{mA}$
	SS-40PA-57F	70mA			$70\text{mA} \leq \text{loset} \leq 700\text{mA}$

# 40W Class I/II NFC Driver with DALI-2 and D4i

## Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
Aux Power	Rated O/P Voltage	21.6V	24V	26.4V	The reference ground is "DA-"
	No Load O/P Voltage			30V	The reference ground is "DA-"
	Rated O/P Current	0		125mA	The reference ground is "DA-"
	Peak O/P Current	0		250mA	The reference ground is "DA-". During a 6ms period, maximum duration of 250mA peak output current 2.2ms, and the average value cannot exceed 125mA.
Integrated DALI-2 Bus Power Supply Voltage		12V	16V	20V	
Integrated DALI-2 Bus Power Supply Current		50mA		60mA	
Life Time( $T_c \leq 80^\circ\text{C}$ )		$\geq 100,000$ hours			80% load
MTBF		250,000 hours			230Vac, Full load, $T_a = 25^\circ\text{C}$ (MIL-HDBK-217F)
IP Grade		IP20			
$T_c$		90°C			
Warranty		8 years			$T_c: 80^\circ\text{C}$
Net Weight		535g			
Dimension		134mm*77mm*37mm			L x W x H

### NOTE:

1. All the parameters above are tested  $T_a 25^\circ\text{C}$  and LED load, unless specified.
2. The DALI-2 bus power supply is enabled by default and can be disabled through the programming interface.



# 40W Class I/II NFC Driver with DALI-2 and D4i

## Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+90°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

## Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
ENEC	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017 EN IEC 62384:2020	✓	
UKCA	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN 62493:2015/A1:2022	✓	
EAC	EN 61347-2-13:2014+A1:2017 EN61347-1:2015+A1:2021	✓	
CE	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN 62493:2015/A1:2022	✓	

EMI/EMS	Criterion	Remark
Conduction Emission	EN IEC 55015:2019/A11:2020	Class B
Radiation Emission	EN IEC 55015:2019/A11:2020	Class B
Harmonic Current Emissions	EN IEC 61000-3-2:2019/A1:2021	Class C
Surge	IEC/EN61000-4-5	DM: 6kV,CM: 8kV,Criterion B
	EN61547:2009	DM: 6kV,CM: 10kV,Criterion B

# 40W Class I/II NFC Driver with DALI-2 and D4i

## Safety Test Items:


Safety Test Items	Technical Indicators	Remark
Insulation Requirements	ENEC Insulation Requirements	
Input to EQUI	4U+2000	Reinforced insulation
Input-Dim	4U+2000	Reinforced insulation
Dim to EQUI	2U+1000	Basic insulation
Insulation Resistance	$\geq 10M\Omega$	Input-Output, Test voltage: 500Vdc
Leakage Current	$\leq 0.7mA_{pk}$	240Vac

### NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference of components.
2. Please short (ACL and ACN), (LED+ and LED- and NTC+ and NTC- ), (DA+ and DA - and Vaux+ )when Hi-pot test.

## Performance Curves:

### Input Inrush Current

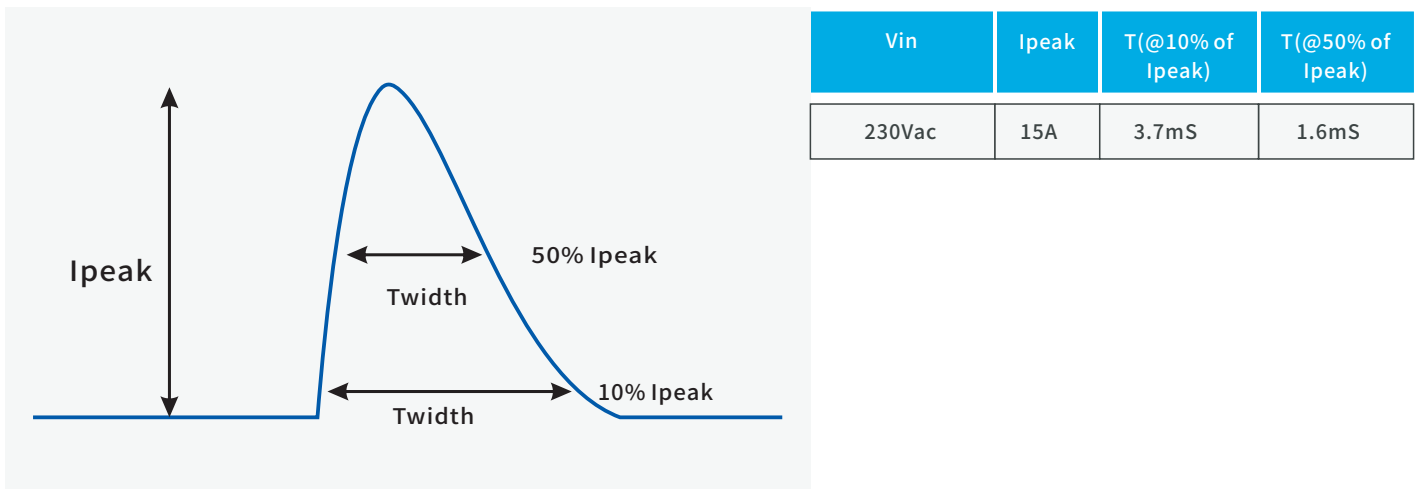


9/20

# 40W Class I/II NFC Driver with DALI-2 and D4i


## Performance Curves:

O/P Voltage Vs. O/P Current(Dim/AOC Window)

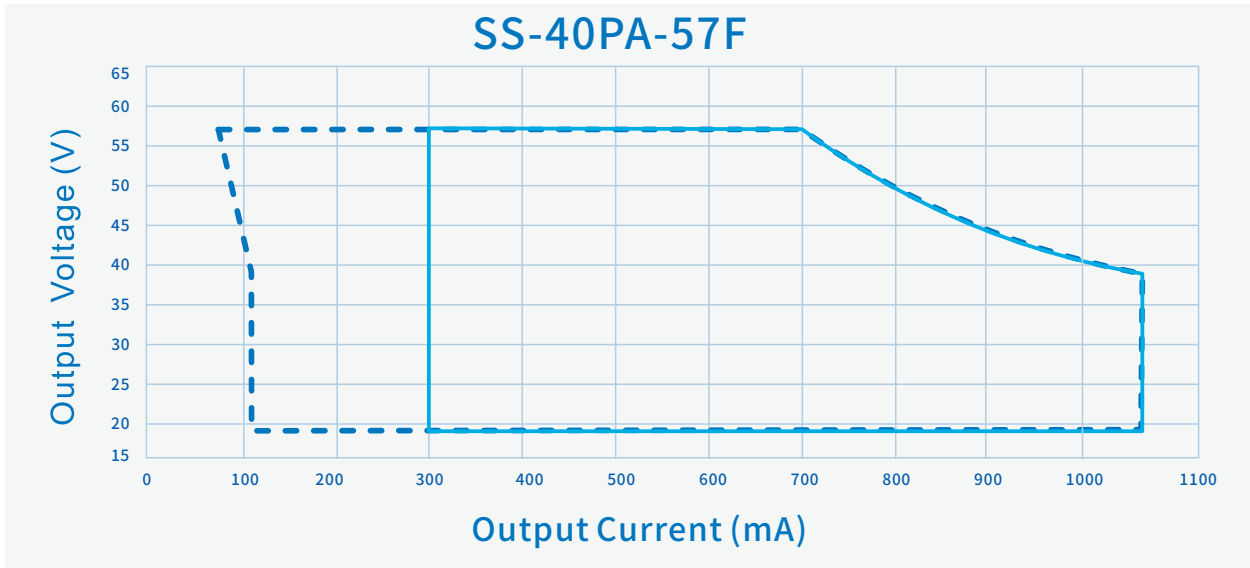

----- Dimming Window      ————— AOC Window

O/P Voltage Vs. O/P Current(Dim/AOC Window)

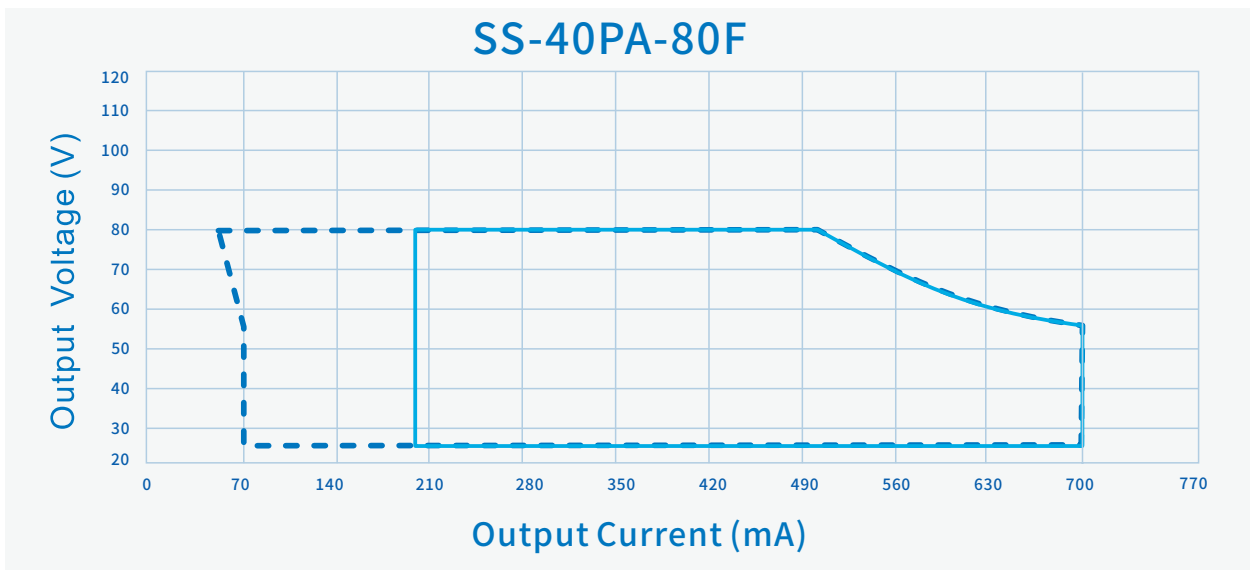


----- Dimming Window      ————— AOC Window

# 40W Class I/II NFC Driver with DALI-2 and D4i


## Performance Curves:

O/P Voltage Vs. O/P Current(Dim/AOC Window)

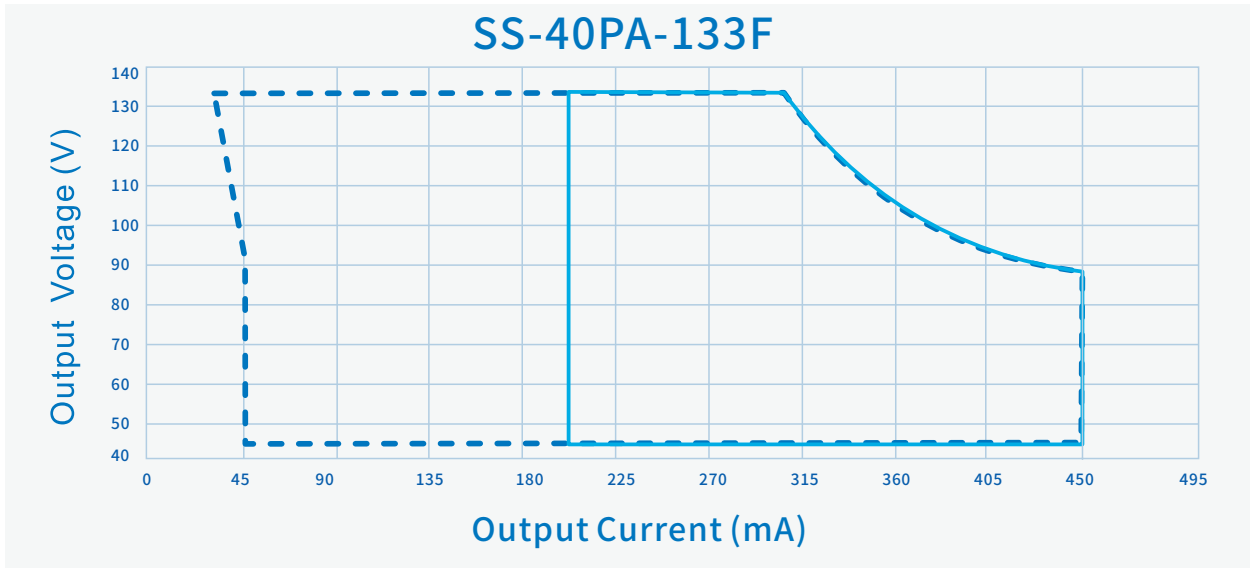

----- Dimming Window      ————— AOC Window

Efficiency Vs. O/P Voltage ( $V_{in}=230V_{ac}$ )

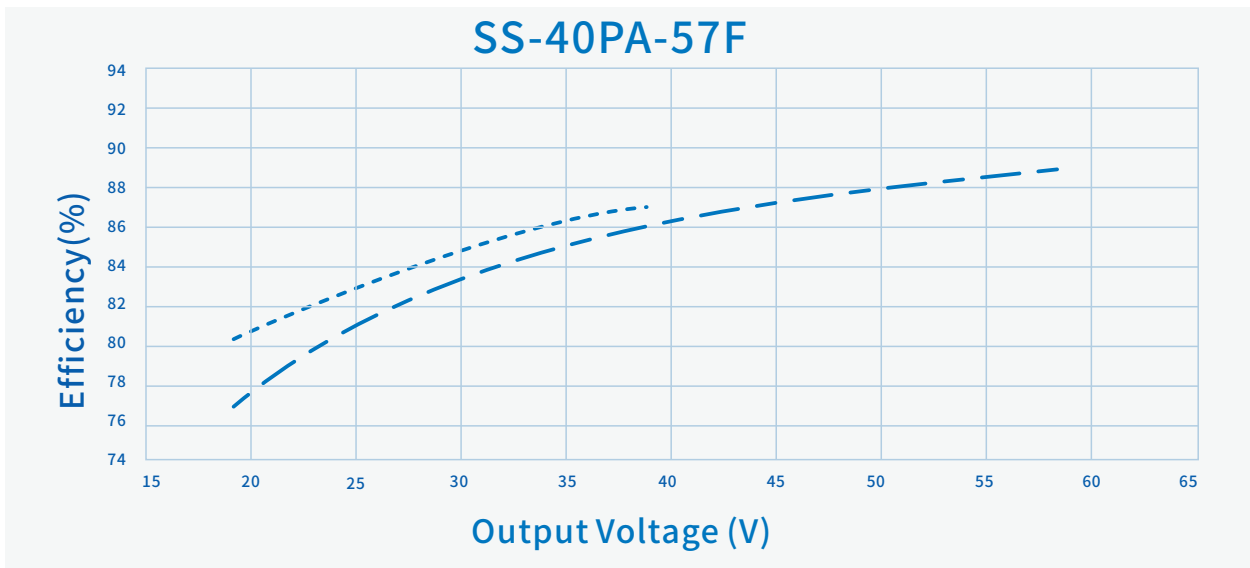


-----  $I_o=1050mA$       - - - -  $I_o=700mA$


# 40W Class I/II NFC Driver with DALI-2 and D4i

## Performance Curves:

Efficiency Vs. O/P Voltage ( $V_{in}=230V_{ac}$ )

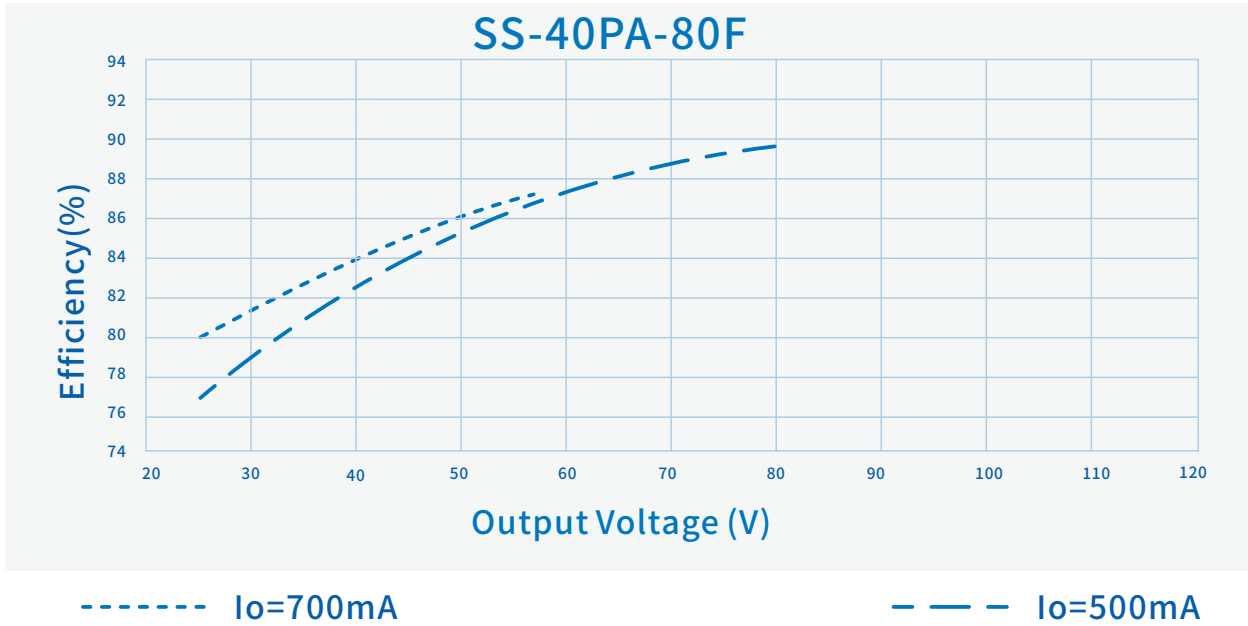


Efficiency Vs. O/P Voltage ( $V_{in}=230V_{ac}$ )

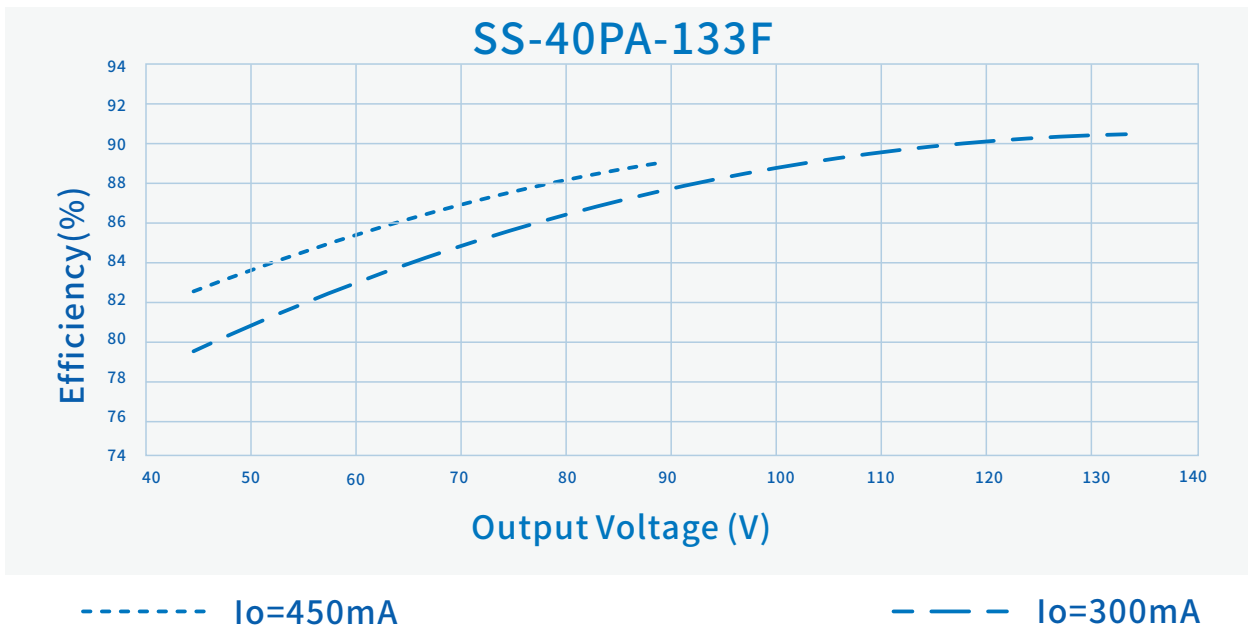

# 40W Class I/II NFC Driver with DALI-2 and D4i


## Performance Curves(SS-40PA-57F/SS-40PA-80F):

### Power Factor Vs. O/P Power

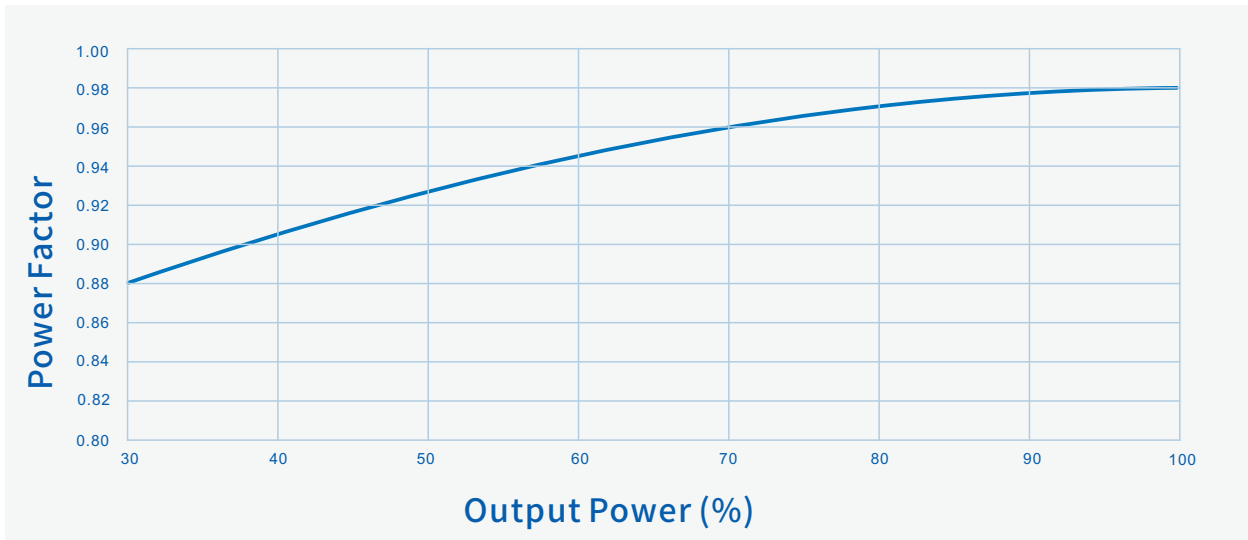

— Vin=230Vac

### THD Vs. O/P Power

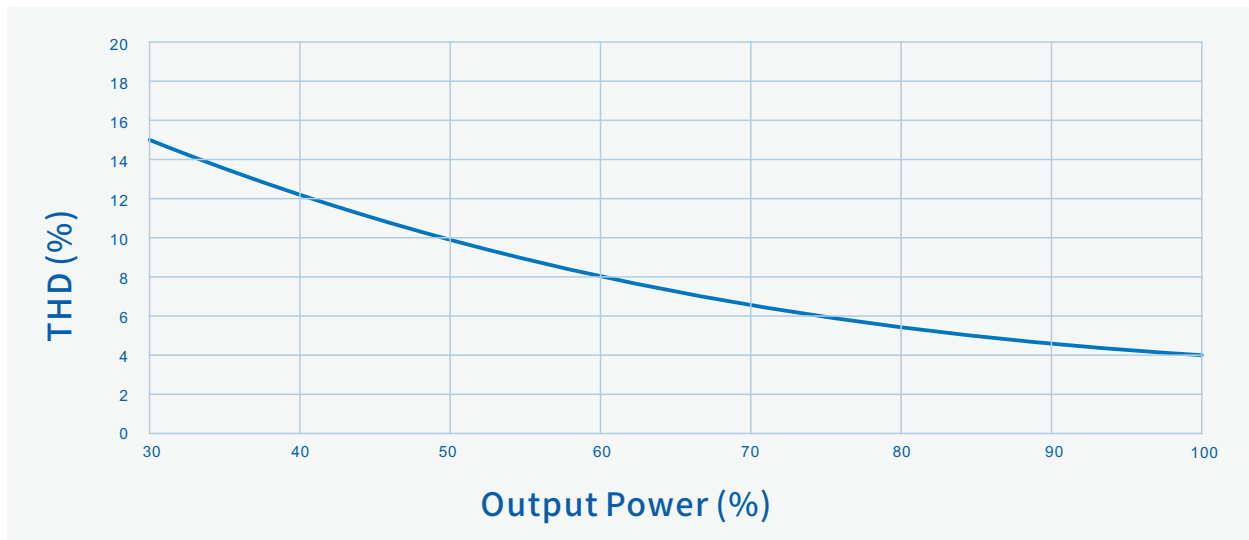


— Vin=230Vac

# 40W Class I/II NFC Driver with DALI-2 and D4i


## Performance Curves(SS-40PA-133F):

### Power Factor Vs. O/P Power

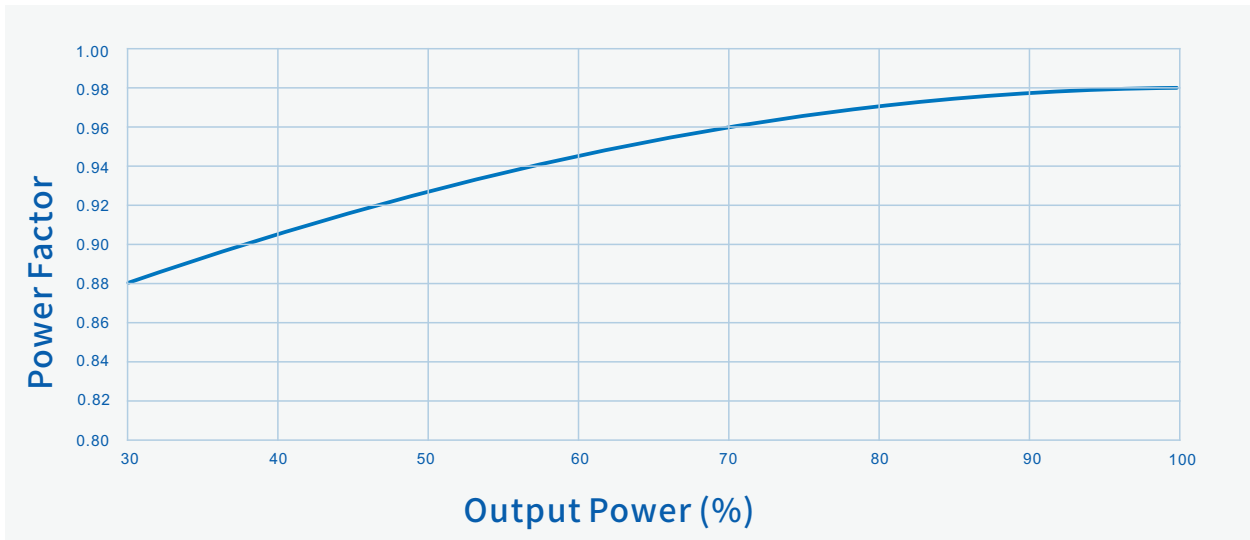

— Vin=230Vac

### THD Vs. O/P Power

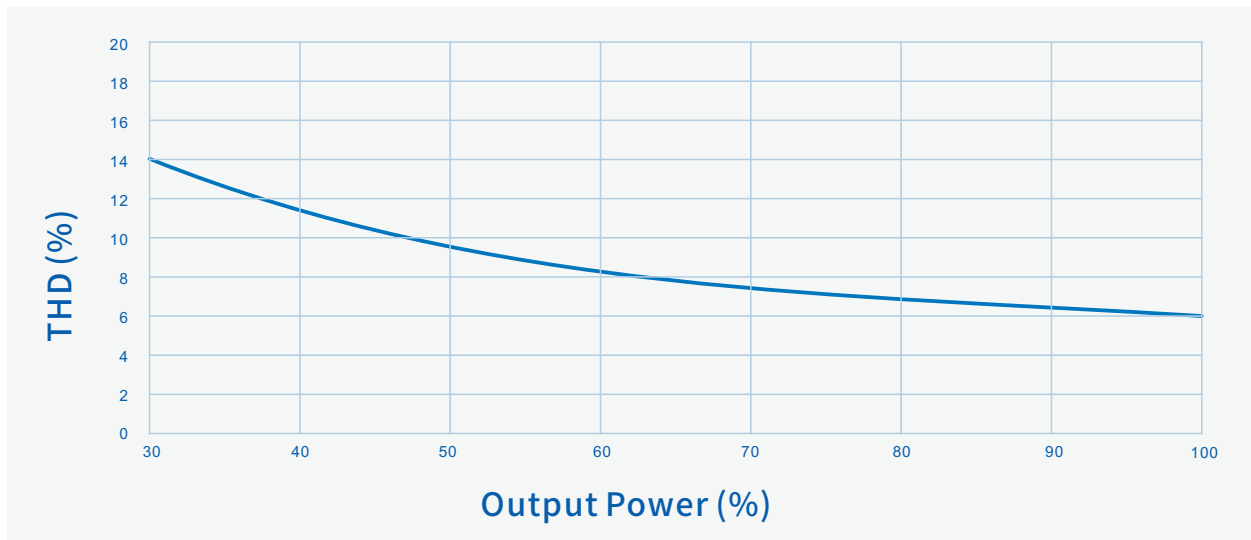


— Vin=230Vac


# 40W Class I/II NFC Driver with DALI-2 and D4i

## Performance Curves:


### Lifetime Vs. Case Temperature

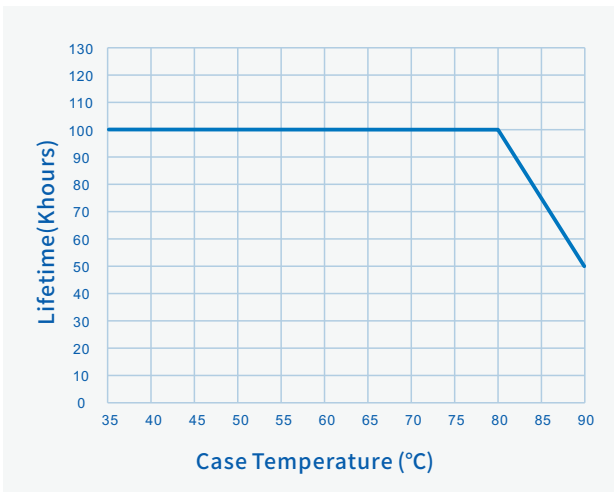

### O/P power Vs. Case Temperature

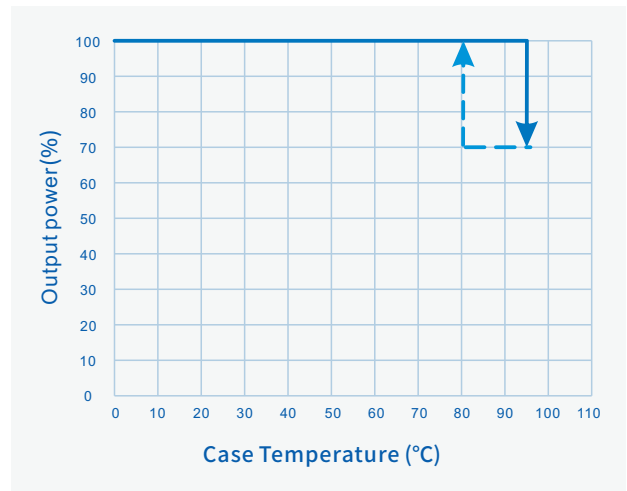

### Linear Dimming Curve

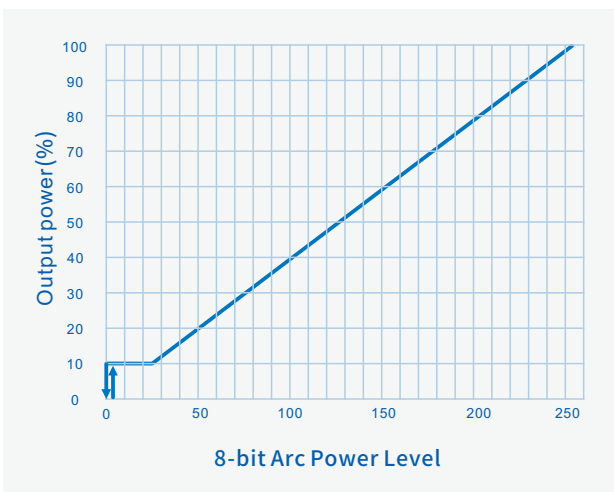

### Logarithmic Dimming Curve





# 40W Class I/II NFC Driver with DALI-2 and D4i

## NTC Functions:


Parameter	Min.	Typ.	Max.	Remark	
External Thermal Protection (NTC)	T1 (Start derating)		60°C		The default value can be set through software, When the temperature of the LED module is $\geq$ T1, the output current gradually decreases
	T2 (Stop derating)		70°C		The default value can be set through software, when the temperature of the LED module is $\geq$ T2, the output current remains unchanged
	T3 (off)		90°C		The default value can be set through software, When the temperature of the LED module is $\geq$ T3, the power is turned off
	Protection Current Setting Range	10%loset	20%loset	100%loset	Default setting is 20%

Note: The recommended NTC is 10K-3950B/3435B

## AC Dimming:

The default range of AC Dim is 160-264Vac. The range can be adjusted via the programming page. Also, the Start Input Voltage, Start Output Level, Stop Input Voltage and Stop Output Level can be set. There needs to be a minimum of 20V gap between Start and Stop Input Voltage settings when programming the driver.

There must be a minimum voltage gap of 10V from the Stop Input Voltage before the driver starts AC Dimming.

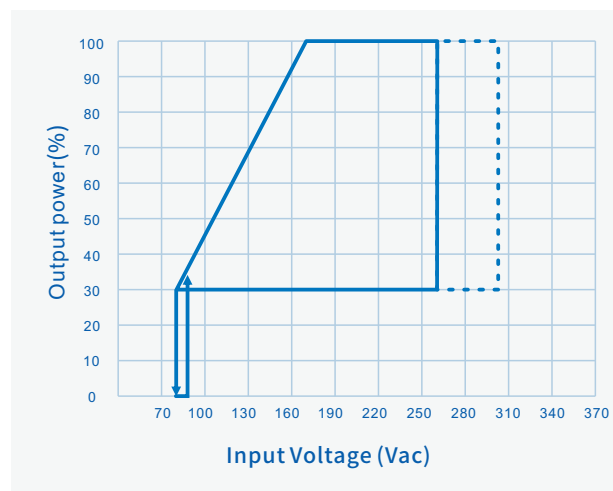

Notes:

1. In the solid line, the driver will operate normally.
2. In the dashed line, the driver will operate safely but not fulfill requirements.

# 40W Class I/II NFC Driver with DALI-2 and D4i

## Software OTP Function:

Software OTP is an optional feature, OTP can be set through the software page.

## Timer Dimming:

Automatic conversion between DST and Standard Time. Traditional Timer Dimming, Self-Adapt-Midnight Timer, Self-Adapt-Percentage Timer. The time dimming percentage can be set by setting 8 curves.

**Traditional timer:** After power-on, it works according to the set timing curve (Increasing fade time allows for slow changes between different dimming levels, preventing sudden changes in brightness and causing dazzle)

**Self Adapting-Midnight:** Automatically save power-on times and use 2 valid timers to assume that the center point of the dimming curve is local midnight time.

**Self Adapting-Percentage:** Runs the initially set dimming curve according to an automatically calculated adaptive cycle time.


## CLO Constant Lumen Output:

Light failure compensation function, in the Luminaire life cycle, by gradually increasing the output current, to achieve a constant output of LED luminous flux, the overall luminous effect remains unchanged.

## ELA End-of-Life Alert:


By presetting a LED driver life time, such as 50KH, after the luminaire has accumulated 50KH of light-up time, every time the luminaire is powered on, it will blink 4 times to remind the user to replace the LED driver.

## NFC Programming connection diagram:

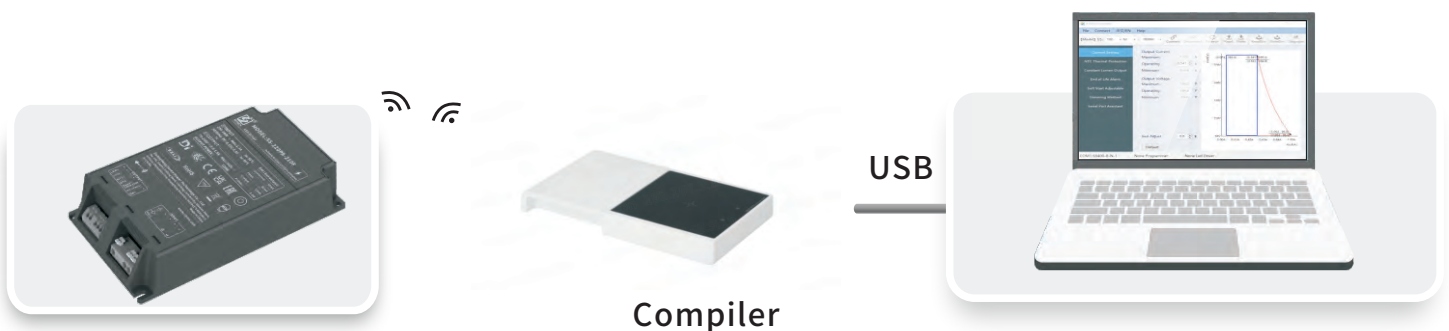

# 40W Class I/II NFC Driver with DALI-2 and D4i

## Mechanical Characteristics



### AC Input Cable:

0.2-1.5mm<sup>2</sup>, 16-24AWG, Solid/Stranded Wire  
Strip length 8.5-9.5mm

### DC O/P Cable:

0.2-1.5mm<sup>2</sup>, 16-24AWG, Solid/Stranded Wire  
Strip length 8.5-9.5mm


### DIM Cable:

0.2-1.5mm<sup>2</sup>, 16-24AWG, Solid/Stranded Wire  
Strip length 8.5-9.5mm

Name Description	Standard Code	mm(In.)
Case Length	L1	134(5.28)
Mounting Hole Length	L2	122(4.8)
Case Width	W1	77(3.03)
Case Height	H	37(1.46)
TC Point Position	X	45(1.77)
TC Point Position	Y	15(0.59)

### Note:

1, Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.

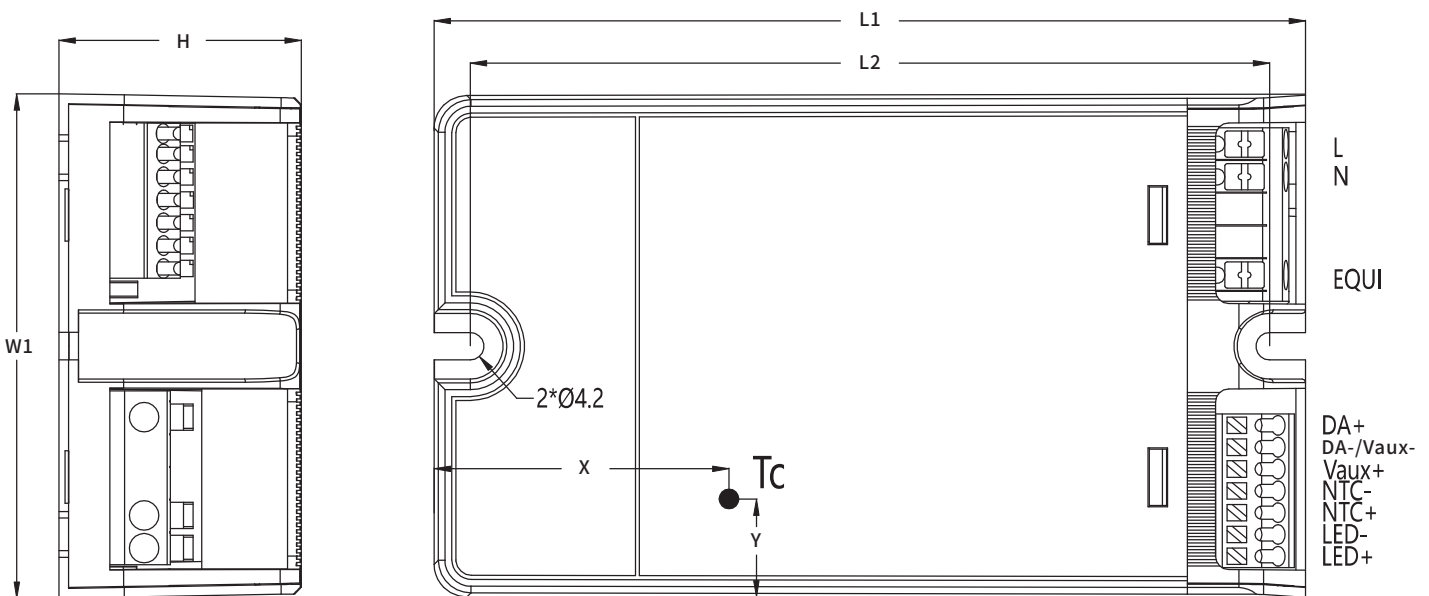

# 40W Class I/II NFC Driver with DALI-2 and D4i



## Package

- Outside carton dimension: L × W × H = 445mm × 300mm × 153mm;
- 30PCS/Carton;
- Net weight/Piece: 0.535kg; Gross weight/Carton: 16.885kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

## Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

## Storage

The product storage meets the standard of the GB 3873—83.  
Products should be rechecked if stored for over 1 year before assembly.

## RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

## Revision History

Version	Description of Update	Updated Date	Remark
V00	Original release	2024/01/12	
V01	Update SafetyTestItems	2024/06/01	
		2024-06-18	

